



Waterproof 100W 150W 200W 240W High Bay Warehouse Lighting

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Yahua lighting
- Certification: CE EMC LVD ROHS
- Model Number: YHZ-HBLA
- Minimum Order Quantity: 10pcs
- Price: USD27.00-48.00/pc
- Packaging Details: Foam+cartons
- Delivery Time: 7days
- Payment Terms: D/A, D/P, Western Union, T/T
- Supply Ability: 10000pcs



Product Specification

- Material: Aluminum
- Input Voltage: AC85-265V
- Lumen Efficiency: 130-140Lm/w
- CRI: >80
- Light Source: High Brightness LED
- Power: 60w 80w 100w 150w 200w
- Application: WAREHOUSE, Exhibition Hall, Factory, Workshop, Warehouse
- Warranty: 3 -5 Years
- Highlight: 240W High Bay Warehouse Lighting, 240W High Bay Lighting



More Images



Product Description

CRI>80 factory warehouse industrial lighting 100W 150W 200W 240W led high bay light manufacturer

Power	60W	100W	150W	200W	300W	400W
Model	YHZ-HBLA-60W	YHZ-HBLA-100W	YHZ-HBLA-150W	YHZ-HBLA-200W	YHZ-HBLA-300W	YHZ-HBLA-400W
Replacement	HPS 150W	HPS 200W	HPS 300W	HPS 400W	HPS 600W	HPS 1000W
Luminous Flux	7800lm	13000lm	19500lm	26000lm	36000lm	48000lm
Light Source	SMD LED					
Luminous Efficacy	130lm/W					
IP	48					
Voltage	85-277VAC/50-60HZ					
CRI	>80					
Control System	APP, remote control, touch screen, light control and other control options available					
Operation Temp.	-40 to +60°C					
CCT	2700K SW/3000K WW/4100K NW/5000K DW/5700K CW					
Life Span	50,000 hours at 25°C					
Dimming	Dimmable Option					
Accessories	Different installation accessories:A - Ring mounting;B - Bracket mounting					
Beam Angle	120°(transparent,matte) 60° 90° (lens)					
PF	>0.95					
Cover	Transparent,matte,lens available					
Warranty	3-5 Years					

Features

- 1.Beam angle : 60 / 90 / 120 degrees.
- 2.Aluminum die casting heat sinks is good for heat dissipation.
- 3.It's major to replace the conventiona high bay light.
- 4.Green ,energy saving,long and reliable life of 50,000 hours.
- 5.No RF interference ,no IR / UV radiation,no mercury pollution.
- 6.Wide colour availability in degrees Kelvin(K),2700-6700K.
- 7.Streamline exterior design,beautiful appearance.
- 8.Environment friendly ,energy saving (70%~80%).
- 9.Special circuit design,each LED work separately,avoiding the single broken LED influence problem.





灯罩




主体




零配件

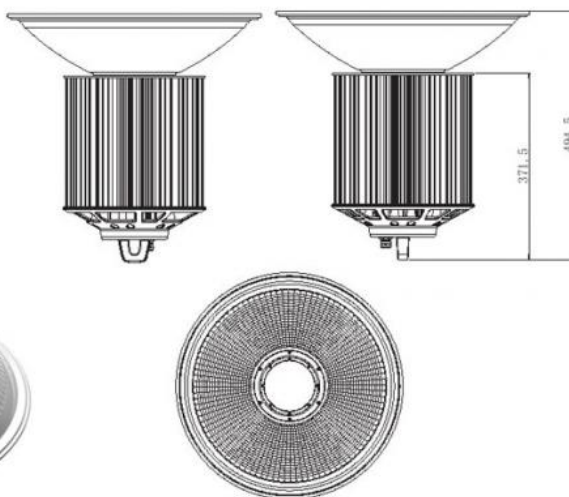

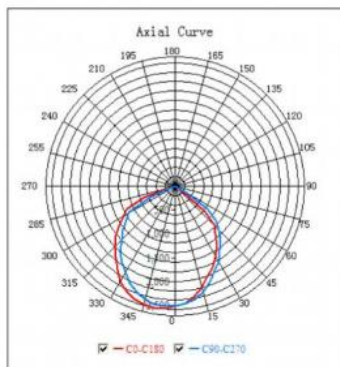


Vertical beam angle(50%): 99.3 Horizontal beam angle(50%): 100.4

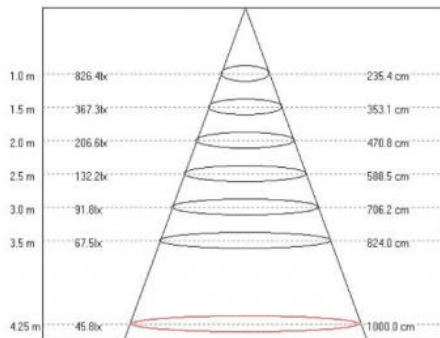


Height(M) Lux(lx) Vertical beam angle(50%): 99.3 Horizontal beam angle(50%): 100.4 Spot Diameter(cm)

1

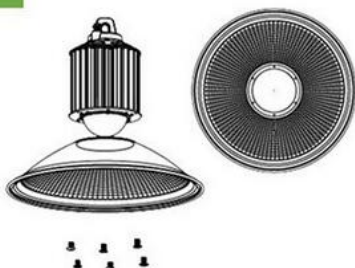


Assemble the screw and reflective cover

2

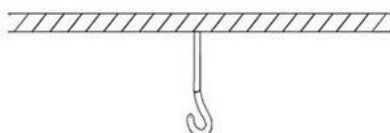


Install hook in advance and make sure not more than 30kg

3



Put the light on the hook


4



L: brown
N: blue

Put the cable in a safe position with screw, then connect the interface of the light
Turn on the power, check the light.


Recommended Installation Height:

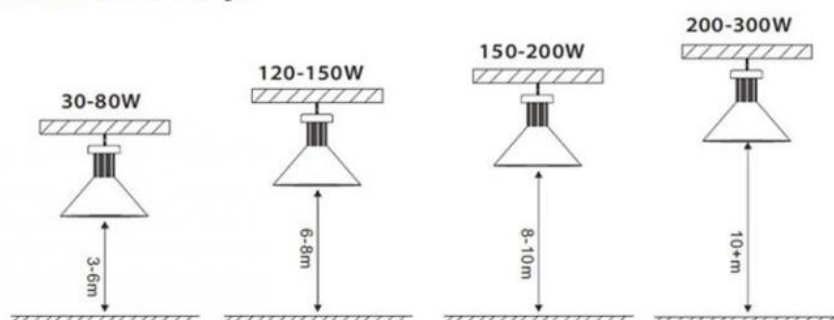



 **Shaanxi Yahua Lighting Electric Equipment Co., Ltd.**

 +86 2981028690

 summer@sxyhzm.com

 solarledstreet-light.com

No.1 Xinxu Avenue New Industrial Park, Hi-tech Zone, Xi'an, China